



19" LOW HEIGHT W/DRAWERS

MODULAR COMPONENTS

INTEGRAL CENTER POSITION OF DRAWER
PULL WITH POLISHED TRIM CENTER
POSITION PREVENTS ROCKING OF DRAWER

PROJECT _____

ITEM NO. _____



Detail of Standard Drawer



Detail of radius corner and tanked bottom

STANDARD FEATURES

- All Heli-arc welded construction
- All 18 gauge 304, 18/8 stainless steel interiors front face doors and door backs
- Polyurethane 'shot-in-place' insulation
- 3/8" interior corners
- Polypropylene breaker strip is foamed-locked in-place using no mechanical fasteners
- High compression non-magnetic vinyl door/drawer gasket
- Flush front drawer-pull (built-into-the-face) is centered eliminating rocking of drawer
- Drawers each accommodates two full size pans side-by-side
- Pre-wired electrical conduit is internally installed within inner and outer walls
- Oversized blower coil with expansion valve, thermostat and solenoid valves
- Exclusive 14ga stainless steel drawer track system with 2" skate wheels

MODELS

REMOTE LOW HEIGHT - 19" BODY HEIGHT ALL DRAWERS

Length	Depth	#Sections	Model
<input type="checkbox"/> 33.1/4"	32"	1	IRRL-1-02
<input type="checkbox"/> 63"	32"	2	IRRL-2-04
<input type="checkbox"/> 92"	32"	3	IRRL-3-06
<input type="checkbox"/> 121"	32"	4	IRRL-4-08

SELF CONTAINED LOW HEIGHT - 19" BODY HEIGHT ALL DRAWERS

Length	Depth	#Sections	Model
<input type="checkbox"/> 51.1/4"	32"	1	IRSL-1-02
<input type="checkbox"/> 81"	32"	2	IRSL-2-04
<input type="checkbox"/> 110"	32"	3	IRSL-3-06
<input type="checkbox"/> 139"	32"	4	IRSL-4-08

OPTIONS


- F Freezer
- SSPL Stainless Steel Right End Panel
- SSPL Stainless Steel Left End Panel
- AS All Stainless Steel Including Ends, Back and Bottom
- ST Stainless Steel Top
- CS Casters
- SSKW Stainless Steel Skate Wheels
- DPL Locking Padlock Assembly for Drawers
- DT Dual Temp. Base
- M Custom / Modified Unit
- MD3 MD3 Mega Drawer (Accommodates three Full Size Pans Side by Side)
- MG Magnetic Gasket



19" LOW HEIGHT W/DRAWERS

MODULAR COMPONENTS

REFRIGERATION AND DRAIN LINE
STUB OUT (RIGHT OR LEFT SIDE)

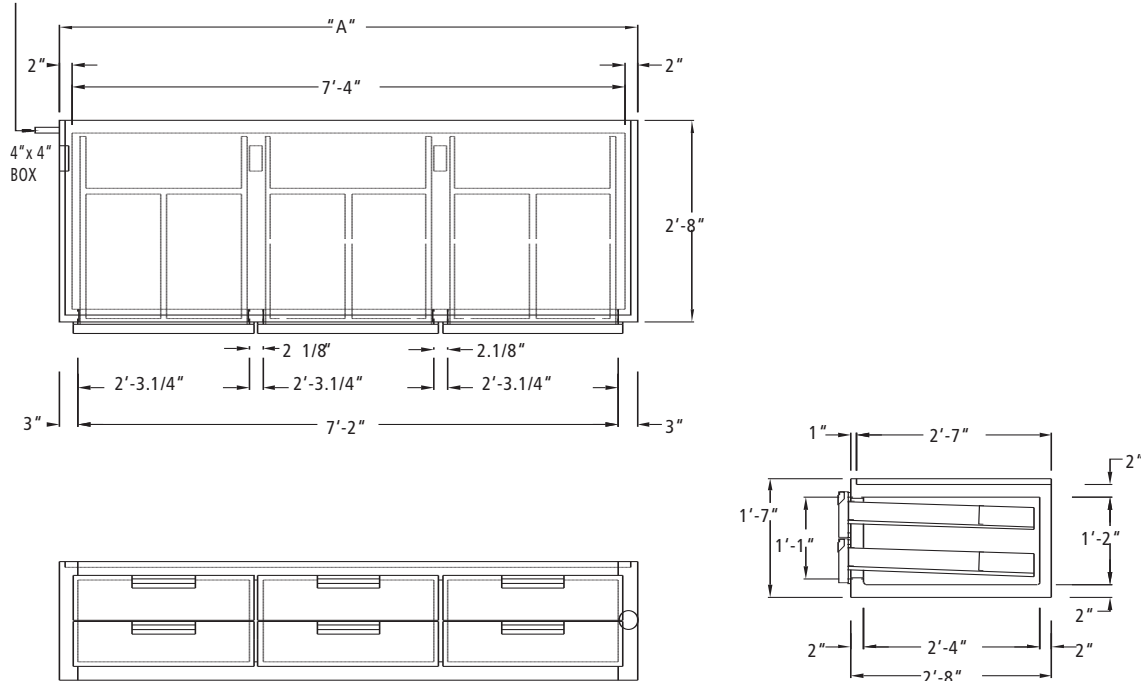

LOW HEIGHT REFRIGERATORS 19" BODY HEIGHT

SELF CONTAINED ALL DOORS								
MODEL	DIMENSION 'A'	H.P	VOLTS	AMPS	PHASE	BTU'S	WEIGHT	CUBE
IRSL-1-02	51.1/4"	1/4 HP	115v	8.2	1ph	1000	480	33
IRSL-2-04	81"	1/4 HP	115v	8.9	1ph	1300	550	51
IRSL-3-06	110"	1/3 HP	115v	9.3	1ph	1300	720	71
IRSL-4-08	139"	1/2 HP	115v	12.4	1ph	2600	970	88

REMOTE UNITS ALL DOORS							
MODEL	DIMENSION 'A'	VOLTS	AMPS	PHASE	BTU'S	WEIGHT	CUBE
IRRL-1-02	33.1/4"	115v	0.73	1ph	800	220	22
IRRL-2-04	63"	115v	1.5	1ph	1300	390	40
IRRL-3-06	92"	115v	1.5	1ph	1300	560	58
IRRL-4-08	121"	115v	3	1ph	2600	710	75